

U260-C

Time & Attendance Terminal



The firmware of U260-C has been upgraded to the new firmware, it has new features like stunning GUI, more stability, faster matching speed and better expandability.

Users can easily manage data by networking U260-C via RS232/485, TCP/IP, and USB-host/client. Most importantly, all the functions can still operate in a networking state. It also supports data backup and retrieve to avoid the risk of accidental deletion.

Feature

Remarkable user experience

- Intuitive and stunning UI designed with the most popular and internationalized element.
- Interface operation adopts modularized hierarchical design.
- Simpler, better and more logical.
- Faster matching speed: Less than 0.5 second.
- Great user interactivity.

Enhanced features and performance

- Multi-languages.
- Data backup and retrieve.
- Advanced User ID consisted of letters and numbers.
- Chip encryption for firmware protection.
- Compatibility with various types of USB flash disks, ADMS and former SDK.


Excellent expandability

- Easy to extend functions and customize customers' requirements.


Specifications

Fingerprint Capacity	3000
ID Card Capacity	10,000 (Optional)
Record Capacity	100,000
Display	3-inch Screen
Communication	RS232/485, TCP/IP, USB-host/client
Standard Functions	Work code, SMS, DST, Webserver, Scheduled-bell, Self-Service Query, Automatic Status Switch, T9 Input, ADMS
Optional Functions	ID/Mifare/HID Cards, External Printer and Bell, Photo-ID,
Software	BioTime
Power Supply	DC 5V 0.8A
Verification Speed	≤0.5 Sec.
Operating Temp.	0 °C- 45 °C
Operating Humidity	20%-80%
Dimension	192.3 × 138.8 × 42.7mm (Length × Width × Thickness)
Gross Weight	1.10 kg


Configuration

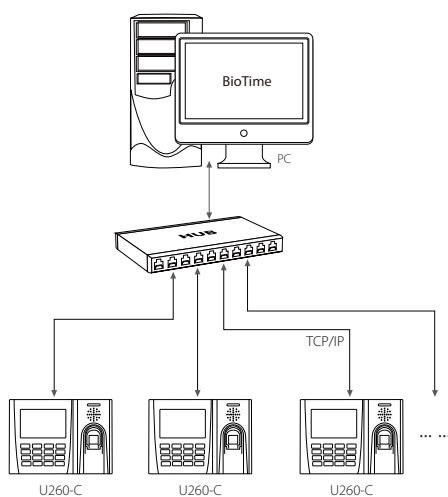


What's in the Box




U260-C



Back Plate



Power Adapter



USB Cable



RJ45 To 485
Conversion Cable



Software CD



Screws and Holders



ZKTeco Middle East
E-mail: zk_me@zkteco.com
www.zkteco.me

© Copyright. ZKTeco Inc. ZKTeco Logo is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.

